


DATE SHEET-C P 3 5 2 4 4 0

Electrical characteristics

Type	CP352440	3.0V 650mAh
System dioxide	lithium/ manganese	
Nominal capacity (mAh)	<u>650@1mA</u> to 2.0V @23°C	
Rated voltage (V)	3.0	
Max. continuous current (mA)	150	
Max. pulse current (mA)	300	
Storage temperature	-20 ~+40 °C	
Operation temperature range	-20°C~+60°C	
Weight (g)	5.8	
Self Discharge Rate	Under 2% for years@30°C	
Jacket	Flexible Aluminum Foil	
Packaging Max. dimensions (mm)	3.6×24.5×41.0	

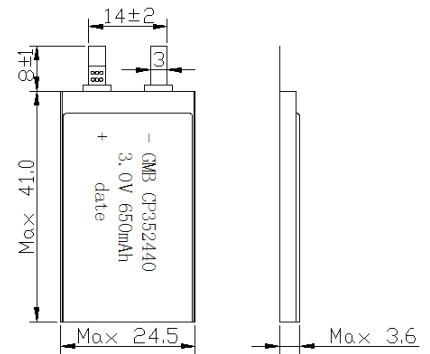

Key Features

- High Energy Density
 - High single cell voltage
 - Light weight
 - Small Size
 - High security
 - Stable operating voltage
 - Wide Operating temperature range
 - Low Self-discharge rate
 - Flexible on shape design
- 1.
 - 2.

Any special or specific for shape, thickness or discharge rate, please consult GMB.

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzao Town,
Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

[Email:sales@gmbattery.com](mailto:sales@gmbattery.com)






BATTERY EXPERT FROM CHINA

Lithium Manganese Dioxide

Discharge Curve

DATE SHEET- CP352440

3.0V 650mAh

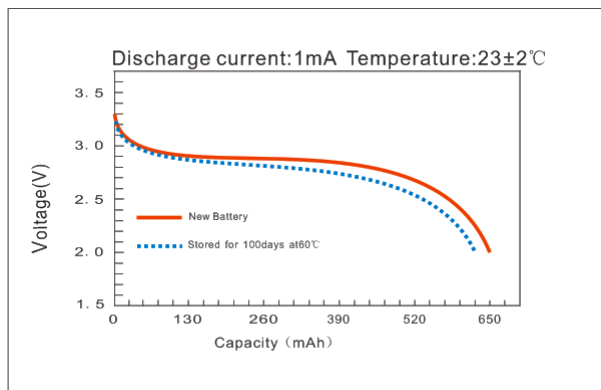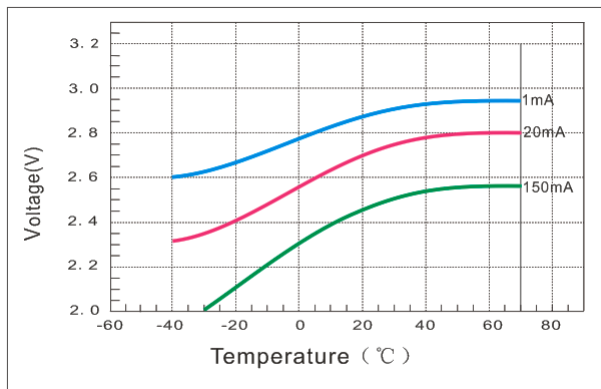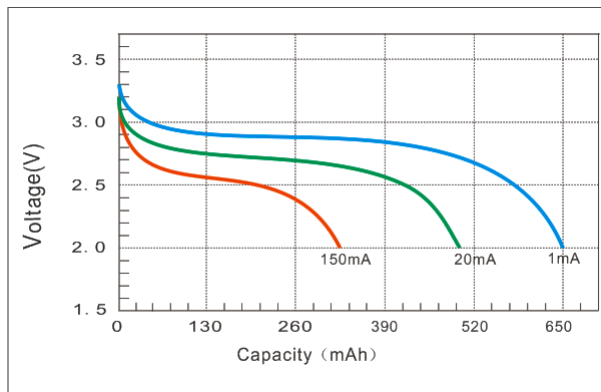

Guangzhou Markyn Battery Co., Ltd.

Block 2, haijing Road 06, Markyns industrial Zone, Xinzhao

Town, Panyu District, Guangzhou, P.R.C..

Tel: (86)20 — 34729558 Fax:(86)20 — 3476 5531

[Email:sales@gmbattery.com](mailto:sales@gmbattery.com)