


Thionyl Chloride Lithium Battery(Li/SOCl<sub>2</sub>)TYPE ER14505H



(at 23±2°C)

DISCHARGE CHARACTERISTICS @23±2°C

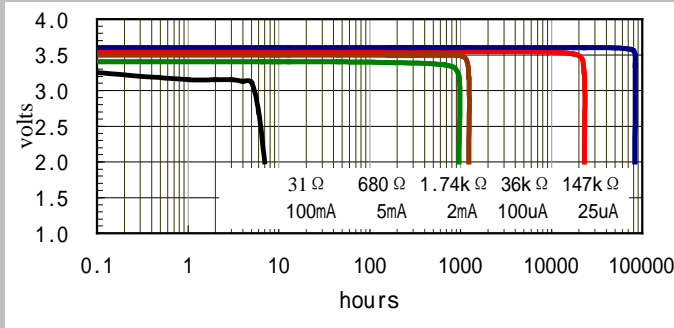

- I Nominal capacity @1mA to2.0V 2.4 Ah
- I Nominal voltage 3.6V
- I Recommend maximum continuous discharge current 100mA
- I Maximum pulse current 200mA
- I Weight 19g
- I Volume 8cc
- I Operating temperature -55~+85°C

VOLTAGE VS. CURRENT

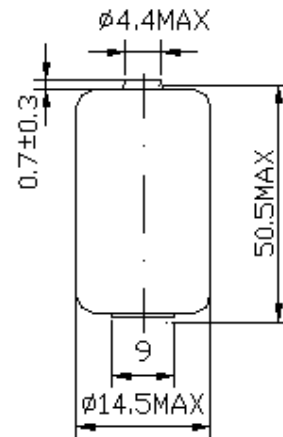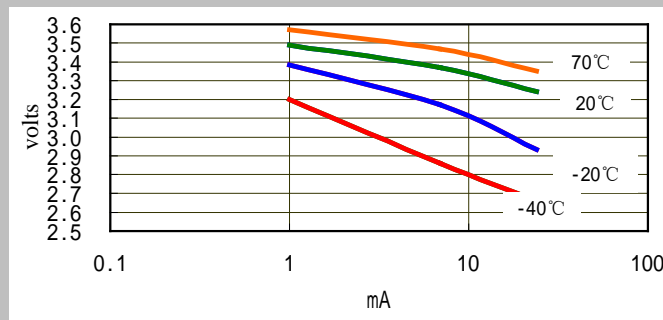


S/: STANDARD  
Dimensions in mm

Availabel terminations:

- /P AXIAL PINS
- /T /PT2 RADIAL PINS
- /PT/TP POLAREZD TABS

CAPACITY VS. CURRENT

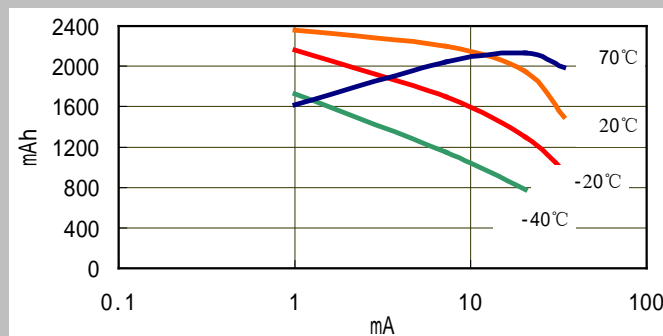

Tel: 86-020-61906348

Fax: 86-020-61906358

E-mail: [info@gmbattery.com](mailto:info@gmbattery.com)

GUANGXHOU MARKYN BATTERY CO., LTD