
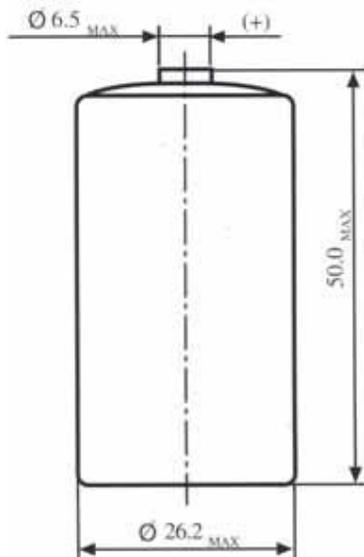


**Sulfur Dioxide Lithium Battery(Li/SO<sub>2</sub>)**

**TYPE: WR26500**

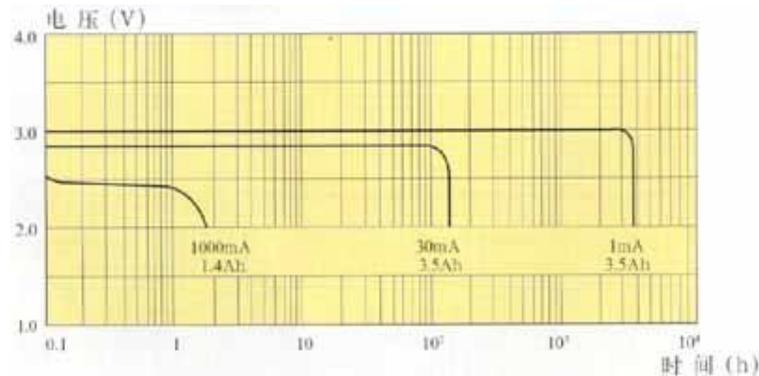

**Performance datas (at 23°C)**

Rated capacity ( 30 mA~2.0 V ) .....	3500 mAh
Rated voltage .....	2.9V
Max. continuous operating current .....	1000 mA
Max. pulse current .....	2000 mA
Battery weight .....	50 g
Battery volume .....	27.0 cm <sup>3</sup>
operating temperature .....	-54°C~+71°C

**Warning:**

Do not short-circuit; do not recharge, over-discharge, assemble / disassemble and crush; risk of fire and burns; do not use under temperature above specified range

\*The above data are only typical characteristics of ordinary batteries. Accurate performance index should be determined as per the actual environment for use and storage.

\*Customers shall not be notified for revision of any of the above data.

\*All the above performances are only for reference and shall not be deemed as the guarantee for the performance index. The official quality assurance of the products shall be confirmed by both vendor and customer when purchase contract is signed.

**Notes:**

- 1.) All dimensions are in mm.
- 2.) Terminals can be made as per the special requirements of customers.