



Measures

Technology

Values

Innovation



VRLA Rechargeable Battery

BC42-12 (BC42-12FR)

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination

APPLICATION

- UPS
- Electronic Medical Equipment
- Wheelchairs
- Golf-Carts
- Lawn Mowers


SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (2.10A, 10.5V)	42.0 Ah
	10 Hour Rate (3.99A, 10.5V)	39.9 Ah
	5 Hour Rate (7.14A, 10.5V)	35.7 Ah
	1 Hour Rate (25.20A,9.3V)	25.2 Ah
Approx. Weight	12.5Kg(27.56lbs.)	
Terminals	B2 (Fitting M5 bolt & nut) , I1 and I2 are optional	
Max. Discharge Current	600 A (5 sec.)	
Max. Charge Current	12 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 12m Ω (Fully Charged)	



CONTAINER MATERIAL

- BC42-12:
ABS: UL 94-HB (Dark gray color)
- BC42-12FR:
ABS: UL 94-V0 (Light gray color)

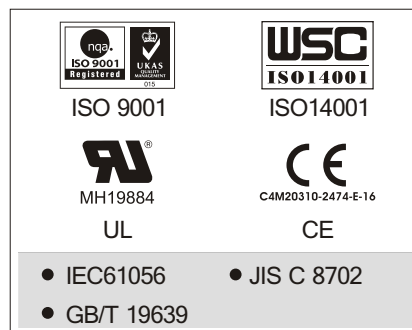


OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
	197±1.5(7.76±0.06)	165±1.5(6.50±0.06)	171±1.5(6.73±0.06)	171±1.5(6.73±0.06)

TERMINAL TYPE


- Terminal B2
 - Dimensions: 15.0(0.59) length, 7.5(0.30) height, 17.0(0.67) total height, 5.5(0.22) offset.
 - Hardware: [M5 BOLT & NUT]
- Terminal I1
 - Dimensions: 5.2(0.20) diameter, 2.0(0.08) height.
 - Hardware: [M5 BOLT & NUT]
- Terminal I2
 - Dimensions: 6.0(0.24) diameter, 2.0(0.08) height.
 - Hardware: [M6 BOLT]

Terminal Hardware Initial Torque:
B2,I1(4.0Nm±5%),I2(5.5Nm±5%)

BC42-12 (BC42-12FR) discharge characteristics (25°C/77°F)

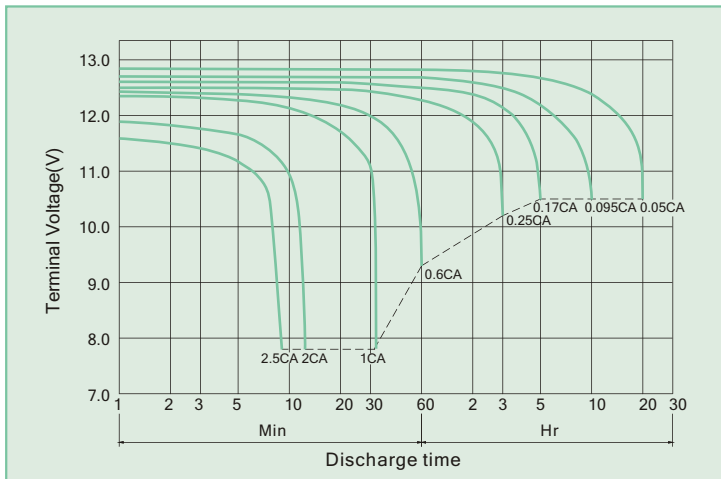


Battery Charging Characteristics

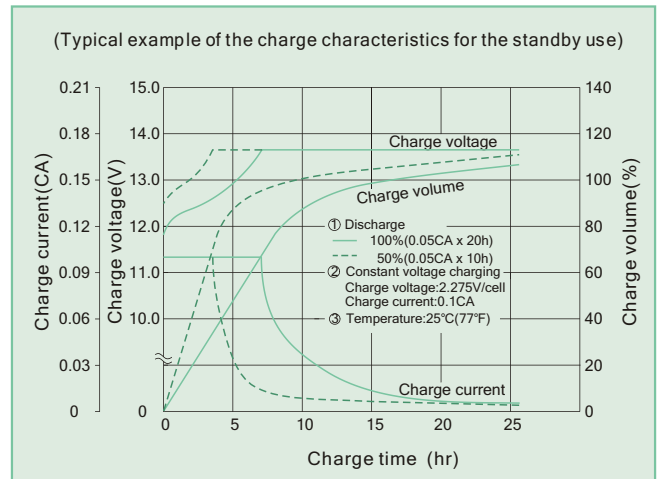

Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Effect Of Temperature On Long Term Float Life

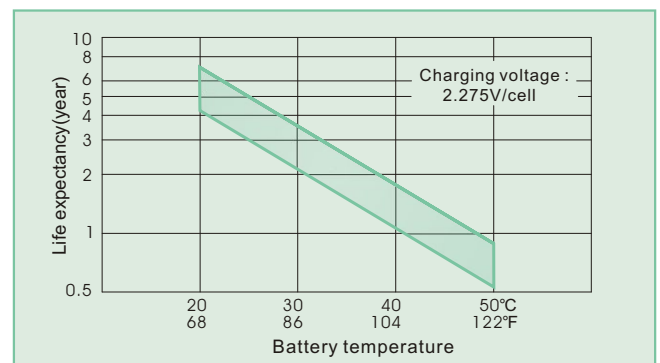

Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	1055.6	860.7	702.7	476.0	299.6	122.4	84.4	47.2	24.8
1.75V	1185.7	932.2	734.8	494.4	308.6	124.9	85.7	47.9	25.2
1.70V	1297.9	964.3	757.1	505.6	314.1	126.0	86.1	48.1	25.3
1.65V	1356.4	988.9	774.9	512.7	317.8	126.8	86.4	48.3	25.4
1.60V	1401.3	1008.9	790.0	517.9	321.1	127.7	86.7	48.3	25.4

Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	96.1	77.6	62.8	40.7	25.2	10.2	7.0	3.9	2.0
1.75V	109.9	84.1	65.7	42.3	25.9	10.4	7.1	4.0	2.1
1.70V	120.3	87.1	67.7	43.3	26.4	10.5	7.2	4.0	2.1
1.65V	128.1	90.9	69.3	43.9	26.7	10.6	7.2	4.0	2.1
1.60V	134.9	94.4	70.6	44.3	27.0	10.6	7.2	4.0	2.1

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

Trial A/1 REV. July. 2010

USA:
B&B BATTERY(USA) INC.
6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.
TEL:1-323-278-1900.1-800-278-8599
FAX:1-323-278-1268
E-Mail:sales@bb-battery.com

CHINA FACTORY:
B.B. BATTERY CO., LTD.
CHENG DONG TRIAL AREA,HUANG GANG,
RAOPING, GUANG DONG,CHINA,515700
TEL:86-768-7601001-2
FAX:86-768-7601469
E-Mail:maggy@bb-battery.com

EUROPE:
B&B BATTERY(EUROPE) B.V.
SUITE 8, HAAKSBERGWEG 33, 1101
BP AMSTERDAM,THE NETHERLANDS
TEL: 31-30-3200190
MOBILE: 886-933896989
E-Mail: gary@bb-battery.com

HONG KONG:
B&B BATTERY(Hong Kong) Co.
TEL:852-2311-4918
FAX:852-2739-1182
E-Mail:bbhk@hkstar.com

JAPAN:
B&B BATTERY(JAPAN) CO., LTD.
1375-11 NARAHARA-MACHI,HACHIOJI,
TOKYO 193-0803,JAPAN.
TEL:81-426-25-6375
FAX:81-426-25-6375
E-Mail:miyata@bb-battery.com

TAIWAN:
B.B. BATTERY(TAIWAN) CO., LTD.
TEL:886-6-502-5150
FAX:886-6-589-8087
E-Mail:kevin@bb-battery.com