



Maintenance-Free Rechargeable Sealed Lead-Acid Battery




EVP44-12

The battery is constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, the battery can use in any direction and position without leakage.

PERFORMANCE SPECIFICATIONS


Nominal Voltage(V).....	12 volts(6cells in series)
Nominal Capacity(AH)	
20 Hour rate F.V.(1.75V/cell) (2.2A to 10.50volts)	44.0A.H.
5 Hour rate F.V.(1.75V/cell) (7.48A to 10.50volts)	37.4A.H.
30 Min rate F.V.(1.30V/cell) (55.0A to 7.80volts).....	27.5A.H.
Approximate Weight.....	15.5kg(34.181lbs.)
Terminal	
Standard.....	Type B2
Optional.....	Type I1
Internal Resistance (Fully Charged Battery).....	<5mΩ
Maximum Discharge Current For 5 sec.(A).....	660A
Maximum Charge Current(A).....	13.2A
Ambient Temperature	
Charge.....	0°C(32°F)~40°C(104°F)
Discharge.....	-20°C(-4°F)~50°C(122°F)
Storage.....	-20°C(-4°F)~40°C(104°F)
Vibration test:	
Frequency: 16.7HZ	
Amplitude: 4mm	
Vibrate the battery horizontally or vertically for 60 minutes. The battery have no abnormality.	
Case.....	ABS
Dimension(mm/inch)	
Length ±1.5mm.....	197/7.76
Width ±1.5mm.....	165/6.50
Container Height ±1.5mm.....	171/6.73
Total Height ±1.5mm.....	171/6.73
Application.....	Wheelchairs, Lawn Mowers, Electronic Medical Equipment, Golf-Carts.

EVP44-12 Battery discharge characteristics (25 °C/77 °F)

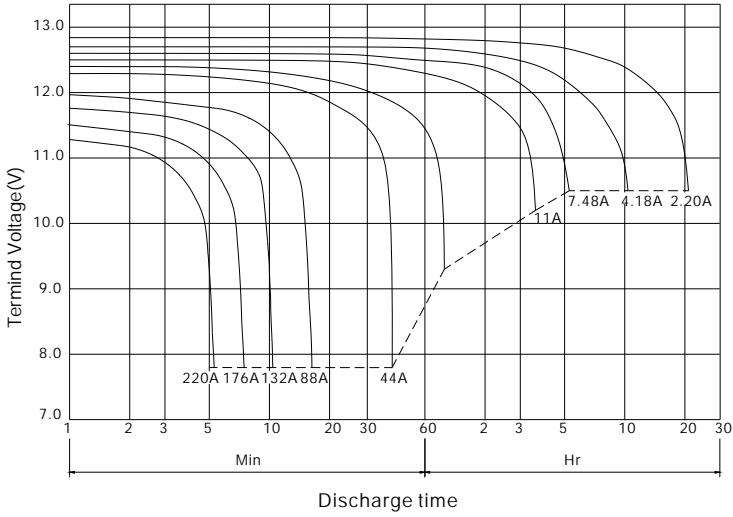

Battery Charging Characteristics

(Typical example of the charge characteristic for the cycle use)

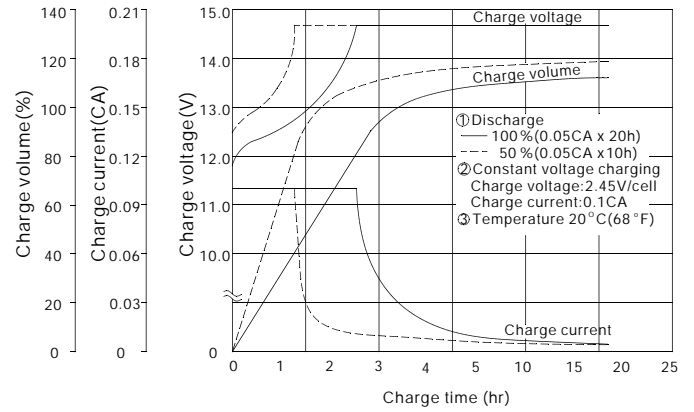


Charging Procedure

Application	Charging method	Charging Voltage at 20 °C (V/cell)	Temperature compensation coefficient of charging voltage (mV/ °C/cell)	Max. charging current (CA)	Charging time 0.1CA, 20 °C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	


*Temperature compensation of charging voltage is not needed, when using the batteries within 5 °C to 35 °C range.

Battery Life Characteristics of Cyclic Use

Testing Conditions : Discharge Current : 1C Amp (F.V. 1.60v/cell)
Charging Current : 0.1C Amp
Charging Volume : 120% OF Discharge Capacity
Ambient Temperature : 20 °C (68 °F)

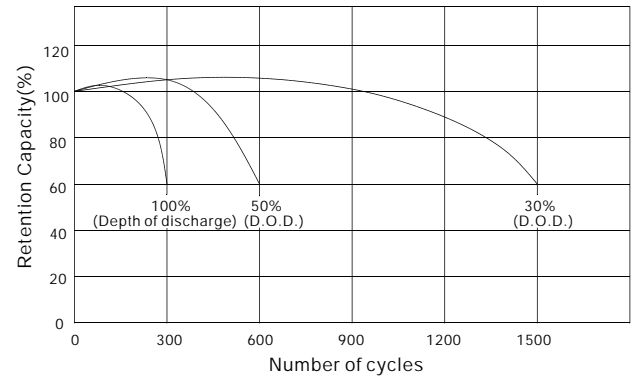


OUTER DIMENSIONS TERMINAL TYPE

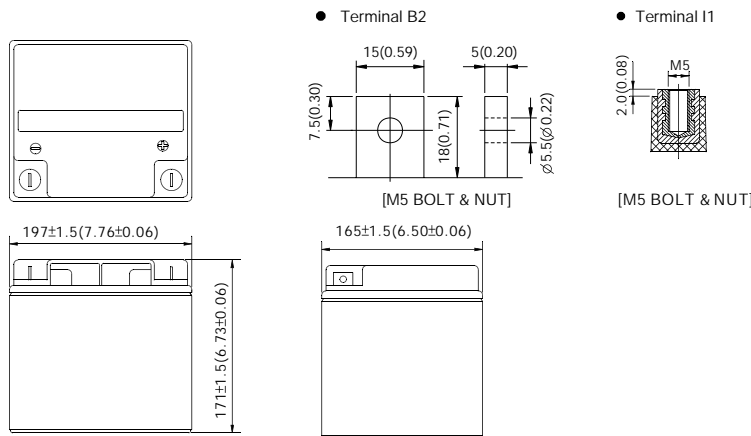

Constant power discharge characteristics at 25°C/77°F

Final Voltage	Discharge time								
	5Min	10Min	15Min	30Min	45Min	1Hr	3Hr	5Hr	10Hr
10.80V	1890	1339	1013	605	428	345	140	88.5	49.3
10.50V	2188	1451	1064	628	446	355	143.5	90	50.3
10.20V	2325	1509	1095	642	455	363	144.6	90.7	50.6
9.90V	2430	1542	1120	652	461	367	146	91.1	50.7
9.60V	2510	1570	1140	660	466	370	146.5	91.4	50.7

TERMINAL POSITION



MH19884



B.B. BATTERY CO., LTD. Web Site: <http://www.bb-battery.com>

USA :

B&B BATTERY (USA) INC.
6415 RANDOLPH ST. COMMERCE,
CA, 90040 U.S.A.
TEL: 1-323-278-1900 1-800-278-8599
FAX: 1-323-278-1268

CHINA FACTORY:

CHENG DONG TRIAL AREA, HUANG GANG,
RAOPING GUANG DONG, CHINA, 515700
TEL: 86-768-7601001-2
FAX: 86-768-7601469

UK:

B & B BATTERY (UK) CO., LTD.
TEL: 44-161-339-9458
FAX: 44-161-343-7030

HONG KONG:

NATIONAL TRADING LTD.
TEL: 852-2301-3800
FAX: 852-2739-1182

JAPAN:

B & B BATTERY (JAPAN) CO., LTD.
TEL: 81-426-256-537
FAX: 81-426-256-537

TAIWAN:

B & B BATTERY CO., LTD.
TEL: 886-6-5898081-3
FAX: 886-6-5898087